

Updated! Canary Uni-Directional Data Security Diodes

Provide:

- **One-Way, Air-Gapped Data Forwarding** ▪ **Reversed Transmissions Blocked** ▪
- **Auto-Negotiation + Auto-Cross UTP Connection** ▪ **9 – 48 VDC Power Option** ▪
- **"We Deliver Data Assurance and Increased Customer Confidence!"** ▪

Canary Uni-Directional Data Security Diodes help defend against a broad range of external, Cross-Domain and insider cyber threats that can escape common security applications to reveal or corrupt sensitive information & make mission-critical Data Services unavailable.

Protect secure servers and sensitive data from compromise. Data Security Diodes stand guard between domains where un-restricted two-way communications increase the risk of penetration, malicious attack and data loss.

Application1: Canary Fast Ethernet **CT-U21SD** and Gigabit **GT-U55SD** Data Security Diodes forward information originating from an *un-secured* open source to a restricted, High-Security destination. Simultaneously, they *optically isolate* the data path to stop all return-path transmissions and completely block the reverse transmission of sensitive information.

Application2: Position a Canary Data Security Diode to optically isolate a secured, trusted, information source and *selectively forward* authorized data to weakly protected *insecure* lower domain destinations.


The partitioned data path *shields the* Secure Source from hidden viruses, Trojans, malicious programs or other intrusion attempts and prevents the corruption or unintended release of critical data, or its loss and non-availability.

Local Diode/Host UTP & Fiber connections are pseudo full-duplex. However, bi-directional full-duplex traffic is not internally forwarded between Diode input and output ports. Flow-Control, IP acknowledgement, and CRC error correction are completely disabled.

Diode variants with **Variable [-V]** Input Power, enables flexible **9-48 VDC** Power choices; and **Conformal Z-Coating [-Z]** offer Environmental Hardening and reduced Tin-Whisker effects.

Another defensive layer for your critical data, Canary Data Security Diodes "*Deliver increased confidence and peace of mind!*"

CT-U21SD & GT-U55SD – UTP to Fiber Single-Point Diodes

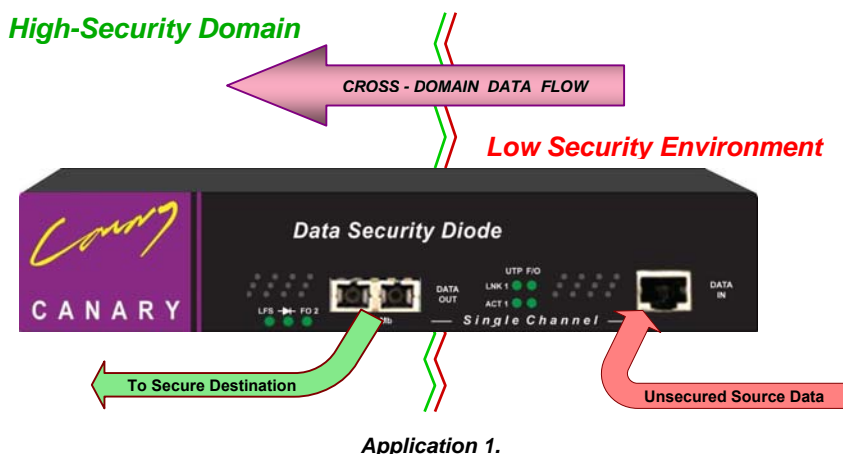

▪ Plug-and-Go Fiber & UTP Connections:

Configure your application to run via UDP. Connect the *un-secure* device to the **CT-U21SD** or **GT-U55SD** Security Diode "Data-In" port; then simply connect the *Security Diode* "Data-Out" port to the Secure Domain Host for *optically isolated* & protected, one-way data transmission (**Application 1**). Reverse the connection scheme for **Application 2**.

▪ Flexible, Secure Network/Host Configurations:

Low to High: Forward information to a Higher Security domain while blocking the un-authorized release of sensitive data in the reverse direction;

High to Low: Restrict authorized user access. Maintain System and Data Security, Integrity and Availability while allowing the limited export of selective information to lower security-level destinations.

▪ Hardwired Immunity from External Software threats:

Canary **CT-U21SD** and **GT-U55SD** *Data Security Diodes* execute their key functions in hardware. With tamper-resistant cases, there is no vulnerable software, firmware, memory or buffers that can be exploited to attack and surreptitiously alter or disable Uni-Directional operation.

Using UDP or similar protocol over the point-to-point link eliminates the need for normal transmission acknowledgments.

Control physical access to your Canary *Data Security Diodes* and their cable connections to thwart unauthorized access and safely deliver critical data where needed – *Easy, Secure, Information Availability!*

Canary Communications

Main Features:

Interfaces – Local Connections:

- CT-U21SD: One each: 100BASE-TX and 100BASE-FX
- GT-U55SD: One each 1000BASE-T and 1000BASE-SX
- CT-U21SD-V [VZ] & GT-U55SD-V [VZ] Same as above
- [Z & VZ ~ include **Conformal Z-Coating** for environmental hardening and Tin-whisker resistance]

[21 ~ SC-type & 22 ~ ST-type m/m Fiber, 91 ~ SC & 92 ~ ST-type s/m Fiber]
[55 ~ multi-mode SX/ SC-type Fiber and 31 ~ single-mode LX/ SC-type]

Networking – Local User Connections:

- 100BASE-TX & 1000BASE-T: Auto-negotiation and Auto-crossover enable half/full duplex Ethernet Diode Links with *remote* Destination Host equipment.
- 100BASE-FX & 1000BASE-SX/LX: Handshaking to auto-configure *local* Full-duplex links with Source equipment. Gigabit Fiber [Fiber Auto] Negotiation not available

Management:

- No management reporting or access to internal functions
- No provision for error handling/reporting

Mechanical & Environmental:


- Mount Inside, Desktop locations or 19" rack-enclosures
 - Two units can be mounted side-by-side on standard 19"-wide shelf (available from Canary)
 - CT-U21SD-V: Same as CT-U21SD plus 9 – 48 VDC Power *
 - GT-U55SD-V: Same as GT-U55SD plus 9 – 48 VDC Power *
- * Above CT-UXXSD-V [VZ] & GT-UXXSD-V [VZ] versions are Special Order

Please contact Canary for technical details on additional models.



Specifications:

Standards:	IEEE 802.3u IEEE 802.3ab,x IEEE 802.1d IEEE 802.1q IEEE 802.3x RFC 2549	100BASE-TX /FX * or; 1000BASE-T/SX/LX * Spanning Tree: None VLAN: Limited Functionality Flow Control Not Supported IETF IPoAC & QoS 4-01-99	Power:	Typical 100 ~ 240 VAC Auto-ranging wall-mount Optional: 9 - 48 VDC input + Terminal Block (-V) (-VZ) versions use external DCV Sources CT-U21SD-V [VZ] & GT-U55SD-V [VZ]
Throughput:	CT-U21SD: GT-U55SD:	100 Mbps (One-way transmission) 1000 Mbps (One-way transmission)	9 - 48 VDC:	
Max Distances:	RJ-45/UTP : Fiber Optic :	100 meters 100 Mb: 2 Km, 20, 40, 60, 80 Km 1000 Mb: 500m, 10, 20, 30, 60 Km	Temperature:	Operating: 0° C to 50° C Storage: -20° C to 70° C
Weight:	5.5 lb. (2.5 Kg)	(Shipping Wt.)	Humidity:	Operating: 10% to 80% RH Storage: 5% to 90% RH
			Emissions:	CE Mark EN60950 & EN55022 and FCC Part 15 of Class A
			Safety:	US 21 CFR (J) & EN 60825-1 standards and UL 1950 applications, EN 60950, CE, TUV
			Dimensions:	5.21 in. x 8.43 in. x 1.64 in. (D x W x H) [12.7 cm x 20.3 cm x 4.4 cm] (D x W x H)

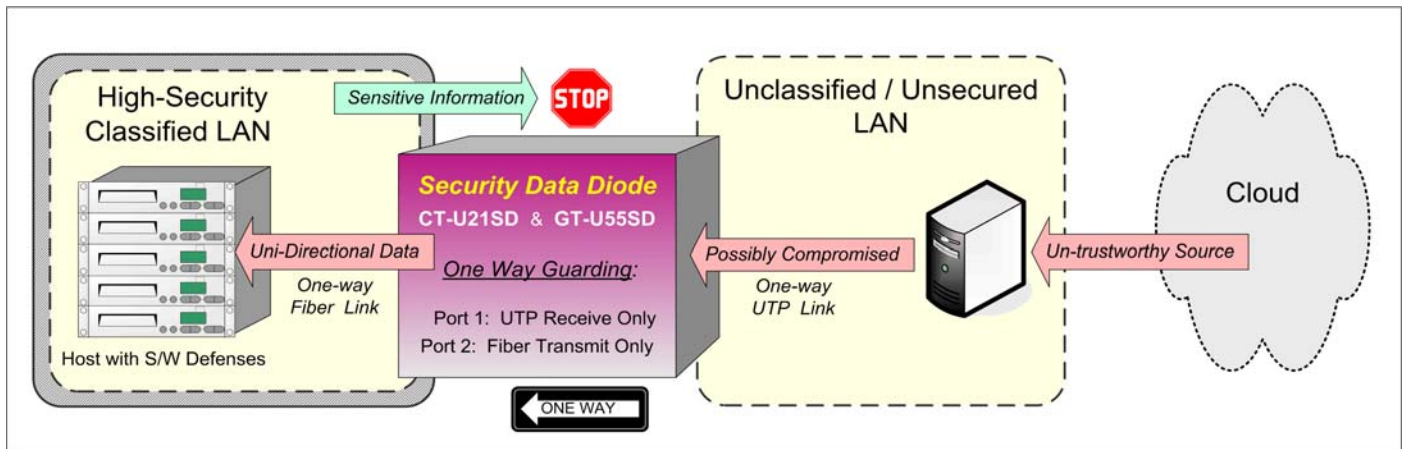

JM 04.12.17

For more information, please visit us at:
www.canarycom.com
info@canarycom.com

The Canary Communications QMS
is Certified to ISO 9001:2015

11-24-21 JM

